



## Independently doffing a leg stocking

### REMOVING THE STEVE+ EASYON

Before taking off the stockings, you must remove the Steve + EasyON from the Steve+:



Grab the Steve+ in one hand, press one pushbutton with the other.




Pull the Steve+ EasyON out of the Steve+.


### POSITION THE RING UNDER THE STOCKING

There are two ways to position the ring under the stocking:


#### 1 PUSHING THE RING UNDER THE STOCKING



Place the ring around the leg above the stocking.




Slide one side of the ring a few inches/cm below the edge of the stocking.




Then push the other side of the ring at parallel height under the stocking.

#### RIGHT RING POSITION



Without a silicone border, place the ring a few inches / cm below the edge.




With a silicone border, place the ring half under the border.


#### 2 PULL THE STOCKING OVER THE RING



Fold the stocking down a bit. Apply the ring around the leg.




Pull one side of the stocking over the ring a few inches.



Grab the other side of the stocking and pull it parallel across the ring.

#### RIGHT RING POSITION



Without a silicone border, place the ring a few inches/centimeters below the edge.




With a silicone border, place the ring half under the border.


## INSTALLATION OF THE STOCKING OVER THE STEVE+ EASYON



Fold the top of the stocking. In this way you'll have a good grip.



First slide the stocking over the Steve+ EasyON at the back. Pull the stocking down.



Roll up the stocking until the heel of the stocking is half way over the edge of the Steve+ EasyON. Put on the stocking.

## POSITIONING OF THE HEEL




HEEL IS POSITIONED TOO HIGH



Roll the heel of the stocking a few inches/centimeters less far over the edge of the Steve+ EasyOn. Put on the stocking.




HEEL IS POSITIONED TOO LOW



Roll the heel of the stocking a few inches/centimeters further over the edge of the Steve+ EasyON. Put on the stocking.




HEEL IS PLACED RIGHT

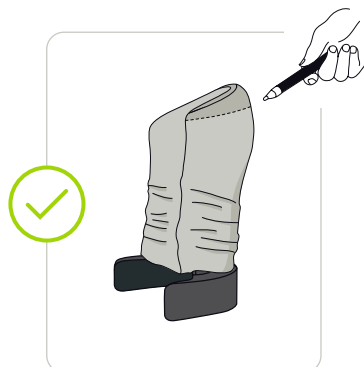


Tip: Mark the right position until where you should roll down the stocking.


**INSTALLATION OF THE STOCKING OVER THE STEVE+ EASYON**



Fold the top of the stocking. In this way you'll have a good grip.



First slide the stocking over the Steve+ EasyON at the back. Pull the stocking down.




Roll up the stocking until the heel of the stocking is half way over the edge of the Steve+ EasyON. Put on the stocking.

**POSITIONERING VAN DE HAK**




**HEEL IS POSITIONED TOO HIGH**



Roll the heel of the stocking a few inches/centimeters less far over the edge of the Steve+ EasyON. Put on the stocking.




**HEEL IS POSITIONED TOO LOW**



Roll the heel of the stocking a few inches/centimeters further over the edge of the Steve+ EasyON. Put on the stocking.



**HEEL IS PLACED RIGHT**

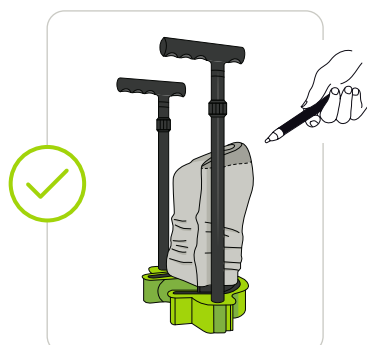

Tip: Mark the right position until where you should roll down the stocking.